

## OPERATING MANUAL

### DMX Demultiplexer 3012B Mk4



(C) SOUNDLIGHT 1995-2008 \* ALL RIGHTS RESERVED \* NO PART OF THIS MANUAL MAY BE REPRODUCED, DUPLICATED OR USED COMMERCIALY WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER \* ALL STATEMENTS WITHIN THIS MANUAL HAVE BEEN CHECKED CAREFULLY AND ARE BELIEVED TO BE ACCURATE, HOWEVER SOUNDLIGHT DOES NOT ASSUME ANY RESPONSIBILITY FOR ERRORS OR OMISSIONS. \* THE USER HAS TO CHECK THE SUITABILITY OF THE EQUIPMENT FOR THE INTENDED USE. SOUNDLIGHT EXPRESSLY EXCLUDES ANY RESPONSIBILITY FOR DAMAGES - DIRECT OR INDIRECT - WHICH MAY OCCUR DUE TO MISUSE, UNPROPER INSTALLATION, WRONG OPERATING CONDITIONS AND NON-COMPLIANCE TO THE INSTRUMENT'S INSTRUCTIONS, AS WELL AS IGNORANCE OF EXISTING SAFETY REGULATIONS.

SOUNDLIGHT *The DMX Company* Bennigser Strasse 1 D-30974 Wennigsen-Steinkrug Tel. +49-(0)5045-912 93-11

**Thank you for choosing a SOUNDLIGHT product.**

The SOUNDLIGHT DMX Demultiplexer 3012B is an intelligent DMX demultiplexer, able to decode digital data complying with USITT standard DMX-512, or DIN 56930-2 respectively, to analog output voltages of 0...+10V DC. The board can be used with all standard light control systems. Its special advantages include:

- **universal protocol decoding**  
Recognizes all variants of the protocol as defined by USITT/ESTA/WETF/DIN
- **future-proof**  
The unit is software controlled and can be adapted to any change in protocol definition.
- **simple supply**  
The power supply may be derived from unregulated 15...24V DC, stabilization on board
- **signal loss**  
A signal loss of not more than 1s does not affect the output. This is in accordance with the USITT standard. In case of a longer signal loss,
  - all outputs are driven down to 0V (standard), or:
  - all outputs are set to an emergency scene, or:
  - the last setting will remain intact (optional).The board can be supplied with either setting to match your application.
- **cost-effective**  
The SOUNDLIGHT 3012B is a cost-effective solution for many purposes.

## CONNECTORS

The DMX Demultiplexer Card 3012B consists of the following interconnections:


<b>CN1</b>	<b>Universal connector (16 pin)</b>
1	Output 0...10V Channel 1
2	Output 0...10V Channel 2
3	Output 0...10V Channel 3
4	Output 0...10V Channel 4
5	Output 0...10V Channel 5
6	Output 0...10V Channel 6
7	Output 0...10V Channel 7
8	Output 0...10V Channel 8
9	Output 0...10V Channel 9
10	Output 0...10V Channel 10
11	Output 0...10V Channel 11
12	Output 0...10V Channel 12
13	Output 0...10V Channel 13
14	Output 0...10V Channel 14
15	GND 0V
16	Power Supply +15...+24V=

**CN2**                    **DMX Input (XLR 5-pin)**  
 1                    GND  
 2                    -DMX  
 3                    +DMX  
 4                    connected to pin 4 CN3  
 5                    connected to pin 5 CN3

**CN3**                    **DMX Output (XLR 5-pin)**  
 1                    GND  
 2                    -DMX  
 3                    +DMX  
 4                    connected to pin 4 CN2  
 5                    connected to pin 5 CN2

**CNN**                    **Power Supply**  
 red                    +15-24V DC  
 blue                    GND

**ATTENTION! Reversing the PSU leads may damage the unit!  
 Schematic see next drawing!**

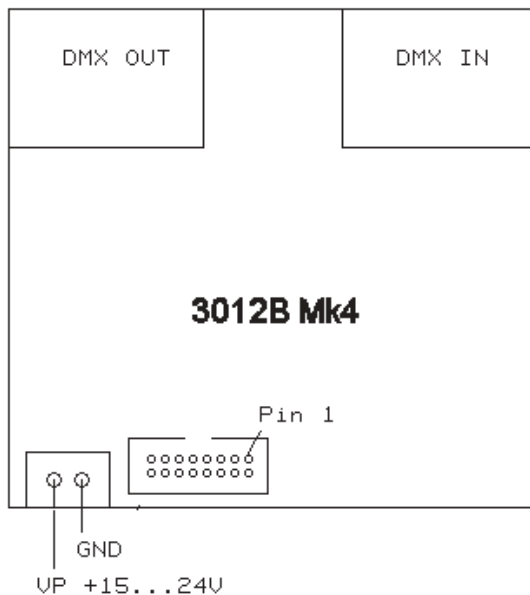

## SIGNAL INDICATORS

The status of the Demultiplex Board is signalled with two LED indicators.

green:                    operation (blinking)  
 red:                    ERROR (blinking)  
                               No error indication while normal operation  
                               Error blinking at data errors or loss of communication.

1x blink: signal loss, general error  
 2x blink: startcode error

## CODING SWITCHES

The three decimal coding switches set the start address, that is the address of the first channel to be decoded. The setting is fully decimal, no binary conversion is necessary as is with DIL switches.

S1:           Ones  
S2:           Tens  
S3:           Hundreds

If the switch block is set to address 000, all outputs are disabled regardless of the data received.

All settings made on the address board are retained in the demultiplexer internal nonvolatile memory. The settings will remain active even when disconnecting the address board after the setting has been saved. Do not detach the address board while the demux is saving configuration data (both LEDs blink alternatively 4 times).

**NOTE:** We recommend to disconnect and to reconnect the address board only when the system is fully powered down. Both printed circuit boards contain static sensitive electronic devices. Please discharge yourself against GND before handling printed circuit boards. For maximum protection, leave pcbs in the antistatic bag when not used.

## DIP SWITCHES

DIP switches are used to configure the board.

DIP SWITCH 1:       DMX HOLD  
ON   =       DMX HOLD, output will be maintained at signal loss  
OFF  =       NO HOLD, output will be set according to DIP switch 2

DIP SWITCH 2:       SAFETY LEVEL AT SIGNAL LOSS  
ON   =       100%, all outputs will be driven to FULL ON  
OFF  =       0%, all output will be driven to OFF

DIP SWITCH 3:       SMOOTHING  
ON   =       signal smoothing ON (slow response)  
OFF  =       signal smoothing OFF (fast response)

## SERVICE SETTINGS

The Demultiplexer 3012B may be set to special service settings to test individual outputs. Selecting the address will set the appropriate output to 100% level.

801:   Output 1 to 100%  
802:   Output 2 to 100%  
803:   Output 3 to 100%  
....up to:  
812:   Output 12 to 100%

## TEST PROGRAMS

The Demultiplexer 3012B may be set to run internal self-test programs. This is to check the internal function of the Demultiplexer board.

- 997: all outputs are blinking synchronously
- 998: all outputs are ramping up from 0% to 100%
- 999: all outputs are blinking as running light

## TECHNICAL DATA

Dimensions:	70 mm x 70 mm x 45 mm
Supply:	15...24V DC 35mA without load
DMX IN:	1 Unit Load
DMX OUT:	>20 Unit Load, buffered
Analog Out:	0.4...+10.4V, typ. 2mA, max. 4 mA
Order code:	3012B-EP

## CE CONFORMITY



This DMX demultiplexer is microprocessor controlled and uses high frequency (16 MHz quartz). The interface has been tested in our emc lab to comply with EN5022B and IEC65/144.

To ensure the best performance regarding radiated and conducted emissions we suggest to install the interface card in a closed, conductive (e.g. metal)

housing, which must be connected to GND.

Please make sure that shielded data cable is used throughout and the shield is connected properly to the GND pin. Shield must never make contact to other signal lines.

## FCC STATEMENT

This product has been tested and complies with the specifications for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used according to the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which is found by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment or devices
- Connect the equipment to an outlet other than the receiver's
- Consult a dealer or an experienced radio/TV technician for assistance

FCC Caution: Any change or modification to the product not expressly approved by SLH could void the user's authority to operate the device.

## DISTURBANCES

If a trouble-free operation cannot be guaranteed, disconnect the decoder interface and secure it against unwanted operation. This is especially necessary, when

- the unit shows visible damages;
- the unit does not operate;
- internal parts are loose;
- interconnection cables show visible damages.

## LIMITED WARRANTY

This instrument is warranted against defects in materials and workmanship for a period of 12 months, beginning with the date of purchase. The warranty is limited to repair or exchange of the hardware product; no further liability is assumed. SOUNDLIGHT is not responsible for damages or for loss of data, sales or profit which arise from usage or breakdown of the hardware product. In Germany, SOUNDLIGHT will repair or replace established defects in hardware, provided that the defective part is sent in, freight paid, through the responsible dealer along with warranty card and/or sales receipt prior to expiration of warranty.

Warranty is void:

- when modifying or trying to repair the unit without authorisation;
- modification of the circuitry;
- damages by interference of other persons;
- operation which is not in accordance with the manual;
- connection to wrong voltage or current;
- misuse.

## SERVICE

There are no parts within the DMX Demultiplexer Board 3012B which require the user's attention. Should your unit require servicing, please send it to the factory, freight paid.

## INTERNET-HOTLINE

Please use our internet domain <http://www.soundlight.de> for new versions, updates etc. If you have any comments which may be worth considering, please send a message to [info@soundlight.de](mailto:info@soundlight.de). We will check your message and reply accordingly.

## ENVIRONMENTAL NOTICE



When the end of the useful lifetime of this product has been reached, it must be disposed of properly. Electric and electronic devices must not be placed in domestic waste. Contact your local authorities for information about a suitable collection point in your neighbourhood. SOUNDLIGHT is a WEEE registered company.